

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 August 2005 (04.08.2005)

PCT

(10) International Publication Number
WO 2005/071267 A1

(51) International Patent Classification⁷: F04B 43/00,
43/02, 43/06

(21) International Application Number:
PCT/GB2005/000201

(22) International Filing Date: 21 January 2005 (21.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0401198.7 21 January 2004 (21.01.2004) GB
0409149.2 24 April 2004 (24.04.2004) GB

(71) Applicant (for all designated States except US): IMI VI-
SION LIMITED [GB/GB]; Tything Road, Alcester, War-
wickshire B49 6EU (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): NIGHY, Richard,
John [GB/GB]; 78 Wetherby Way, Stratford on Avon

CV37 9LU (GB). HUNTER, John [GB/US]; 12444
Pointe Circle, Rogers, MN 55374 (US). BRAMLEY,
Hugh, Christopher [GB/GB]; 13 Barn House Mews,
London Green, Rugely, Staffordshire WS15 4QA (GB).


(74) Agent: BARKER BRETTELL; 138 Hagley Road, Edg-
baston, Birmingham B16 9PW (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: FLUID METERING WITH A DISPOSABLE MEMBRANE TYPE PUMP UNIT

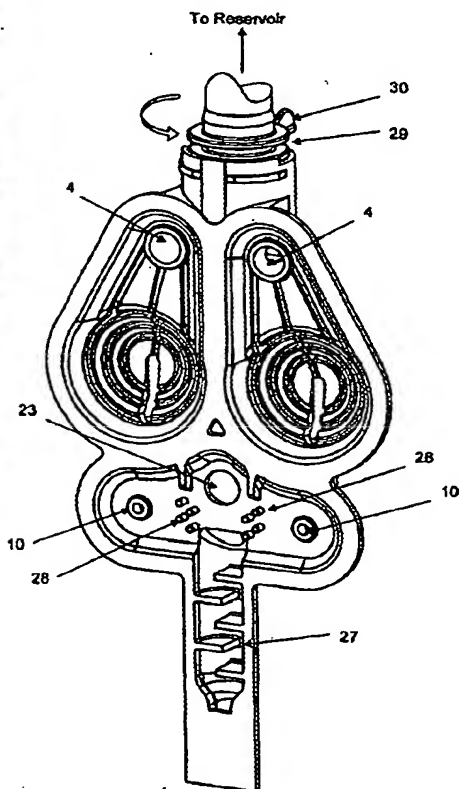

(57) Abstract: A disposable pump unit (100) for receiving and metering a predetermined volume of fluid has a body with a surface at which opens the mouth of a cavity (7) formed in the body. An inlet port (4) for the fluid opens at the surface adjacent to the mouth of the cavity (7) and a plurality of outlets (9) are provided in the cavity (7) that open to a fluid flow passageway extending through the body and connecting the cavity (7) to an outlet port (10). A flexible membrane (8) overlies the cavity (7), the inlet port (4) and the outlet port (10) and is sealingly secured at its periphery to the surface. A re-usable pump actuating unit (200) is co-operable with the pump unit (100) to position the membrane (8) between the cavity (7) in the pump unit (100) and a matching cavity (21) in the actuating unit (200). The membrane (8) is towards and away from the cavity (7) by connecting the cavity (21) to a source of positive and negative fluid pressure via a port (18). The actuating unit (200) has an armature (19) operable to displace the membrane (8) to close the inlet port (4) when the outlet port (10) is open and an armature (20) operable to displace the membrane (8) to close the outlet port (10) when the inlet port (4) is open. In use, the pump unit (100) draws fluid into the cavity (7) when the inlet port (4) is open and a negative fluid pressure is applied to the chamber (21) and pumps the fluid out of the cavity (7), when the inlet port (4) is closed and a positive fluid pressure is applied to the chamber (21).